

Cerberus™ PRO



Fire detection system

FS720



Modular, networkable fire detection system for detection, evaluation, sounding an alarm, and extinguishing in the event of a fire.

- Control panel range with 5 types of station
- Networking via C-WEB/SAFEDLINK
- Extended networks via C-WEB/LAN backbone
- Powerful peripherals
- Optional, integrated extinguishing control
- Option to connect to Siemens 'Cloud for Buildings'
- Time-saving functions for mounting, commissioning, and service
- Optimum use of customer resources
- High system availability
- Fast processing speed
- Intuitive operation

1	Remote access with Cerberus-Remote
2	'Cloud for Buildings'
3	Customer network
4	Management platform
5	Remote access to management platform
6	Fire damper with actuator
	Transmission of a fault signal
	Transmission of an alarm signal

You will find a detailed labeled version of the diagram above along with further information in the A6V10332842 planning guide, see chapter 'Product documentation'.

The FS720 fire detection system represents the latest generation of global fire control panels from Siemens. The system combines the highest standards of safety with international product innovations and state-of-the-art technology.

The fire control panels, the fire terminals, the joint C-WEB/SAFEDLINK network, and the C-WEB/LAN backbone have all been designed in accordance with EN 54-2, EN 54-4, and requirements that are applicable in Switzerland. When used in conjunction with Cerberus PRO™ peripheral devices on the C-NET detector line, the system offers maximum detection reliability and can adapt perfectly to the conditions at the customer's site.

Features and Functions

- Control panel range with 5 types of station
 - Microprocessor-controlled fire detection system
 - Compact and modular fire control panels for between 252 and 1512 addresses
 - PC-based operation (Cerberus-Remote) via Fast Ethernet
 - Integrated BACnet interface
 - Free control logic
 - Phased evacuation
- C-WEB/SAFEDLINK networking
 - Redundant networking
 - Increased security thanks to degraded mode function
 - Fast data transfer of up to 315 kbit/s
 - Maximum of 32 stations
- Extended networks via an Ethernet backbone (C-WEB/LAN)
 - Heterogeneous networks via Industrial Ethernet (fiber-optic)
 - EN 54-compliant
 - Redundant data transmission
 - Up to 14 sub-nets with up to 16 stations per sub-net
 - Up to 64 stations in the entire network
 - Up to 32000 addresses
- Powerful peripherals
 - Alarm devices, floor repeater displays/terminals supplied via bus
 - All Cerberus PRO FD720 devices and Cerberus Nova devices are supported
- Time-saving functions for mounting, commissioning, and service
 - Ergonomic engineering tool (Cerberus-Engineering-Tool) featuring familiar Windows mechanisms
 - Auto-configuration (self-addressing)
 - Zones and customer texts can be assigned without hardware read-in
 - Automatic test of external alarm indicators
 - Automatic detector test with option to transmit results to the Siemens 'Cloud for Buildings'
 - Remote transmission of diagnosis data (e.g., firmware versions)
- Option to connect to Siemens 'Cloud for Buildings'
 - Secure data transmission from fire detection system to the cloud
 - Management of multiple systems
 - Monitoring and remote control of fire detection systems
 - Alarm and fault management
 - Remote access via Cerberus-Engineering-Tool and Cerberus-Remote

Performance characteristics

Optimum use of customer resources

- Individual control panels or an entire network can be operated from a customer PC using the 'Cerberus-Remote' visualization software
- Redundancy cabling replaced by fail-safe network nodes
- Floor repeater display and terminals operated on the C-NET detector line

High system availability

- Remote access via GAP or cloud
- Efficient troubleshooting thanks to remote transmission of diagnosis data
- Maximum reliability and secure detection
- Auto-configuration for primary site protection

Intuitive operation

- Easy and time-saving operation thanks to user-friendly and self-explanatory menu structure
- Efficient mounting, commissioning, and configuration thanks to pre-assembled control panels
- All system devices can be accessed remotely via a network device
- Download of the topology, consisting of periphery and installation, in the Engineering Tool
- Minimal training overheads thanks to an integrated operating and hardware concept and the 'Cerberus-Engineering-Tool' Engineering Tool for the entire system

Fast processing speed

- Data transmission rate of 315 kbit/s in fail-safe sub-net and 100 Mbit/s in a backbone Ethernet network
- Short download and upload times
- Logical configuration data created prior to site installation

General functional principle

The Cerberus PRO FD720 fire detectors and Cerberus Nova fire detectors detect fire phenomena, compare and evaluate them based on the available stored samples and send a signal to the fire control panel if they have detected a fire. The fire control panel evaluates these signals and triggers individually configured fire controls, evac. controls, and, if available, integrated extinguishing controls.

In the event of faults, degraded mode safeguards the operation of those parts of the system that are detrimentally affected by the fault. All signals transmitted to the fire control panel or sent by the fire control panel are automatically displayed on the Person Machine Interface of the fire control panel according to where they originate and can be dealt with by means of operating functions.

The fire control panel saves all messages in the event memory together with a time stamp so that the source of the fire can be determined at a later point.

System Applications

FS720 is a modular, networkable fire detection system for detection, evaluation, and sounding an alarm in the event of a fire.

Due to its high flexibility and interconnectivity, the application spectrum of the FS720 fire detection system ranges from small hotels, restaurants, and workshops to extremely large applications with special requirements for availability and redundancy, such as airports, shopping malls, and large industrial plants.

The option to seamlessly integrate an automated extinguishing system into the fire detection system completes the application spectrum.

Networking

Networking of fire control panels



The diagrams have been simplified and do not include additional network hardware or security components. Permissible applications are described in the A6V101039439 Network Security Guidelines document. Contact your Siemens IT security expert for more information.

Up to 32 control panels and terminals can be linked to form one C-WEB network. If the C-WEB network is connected to a danger management system via BACnet, up to 16 control panels and terminals can be networked.

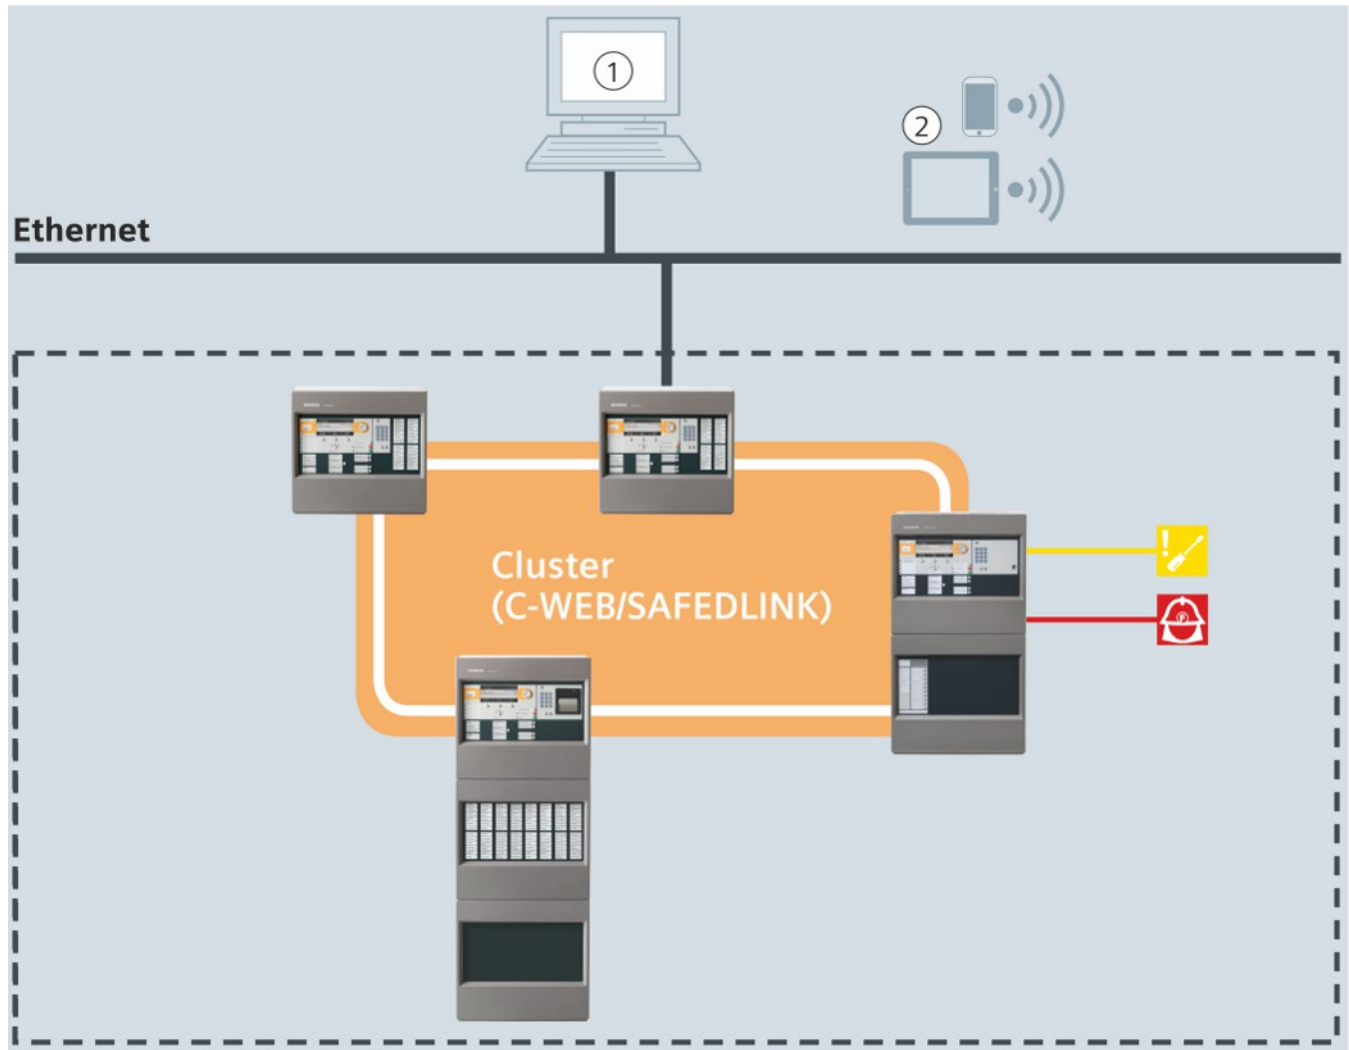


Fig. 2: Sub-net

1	Management platform
2	Remote access to management platform
	Transmission of a fault signal
	Transmission of an alarm signal

An optical C-WEB/LAN network (without sub-networks) allows operation of a maximum of 64 stations in a single network.

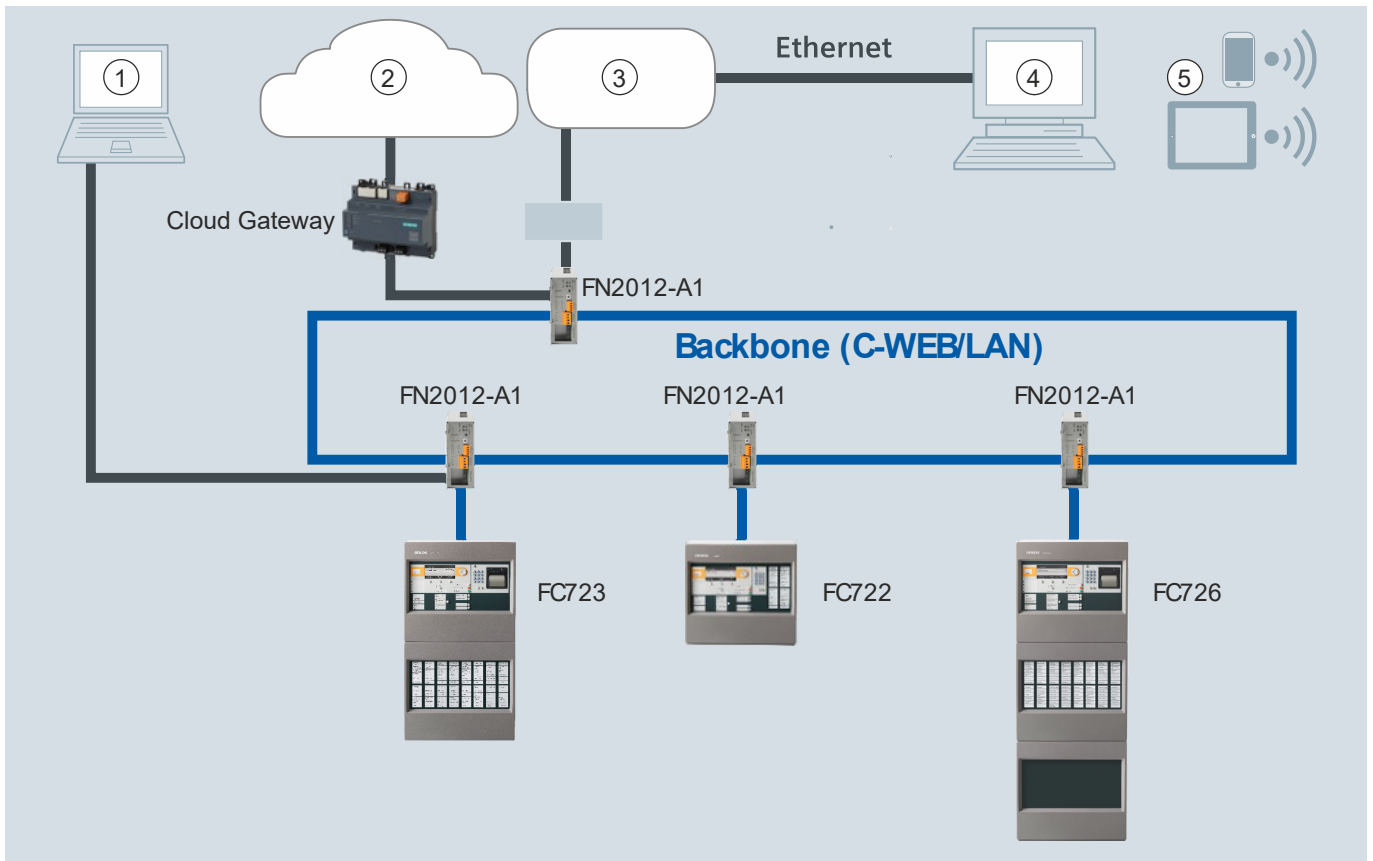


Fig. 3: Networking via 'C-WEB/LAN' without a 'subnet'

1	Remote access with Cerberus-Remote
2	'Cloud for Buildings'
3	Customer network
4	Management platform
5	Remote access to management platform

You will find a detailed labeled version of the diagram above along with further information in the A6V10332842 planning guide, see chapter 'Product documentation'.

An extended redundant network via 'C-WEB/LAN' without a sub-net is a glass fiber Ethernet network without 'SAFEDLINK sub-net'. This type of networking meets the requirements for communication in 'Degraded mode' and is EN-54-compliant.

The following preconditions/restrictions are applicable:

- To ensure EN-54 conformity, the following setting must be activated in the 'Cerberus-Engineering-Tool': 'Degraded signal forwarding enabled'.
- The network must be implemented via one connection module (MoNet) FCA2031-A1 and one Ethernet switch (modular) FN2012 per 'Station' in each case.
- A maximum of 64 'Stations' can be networked via the 'C-WEB/LAN' without a sub-net.

An optical C-WEB/LAN network allows up to 14 sub-nets with up to 16 stations to be operated in one network. A maximum of 64 stations is supported in total.

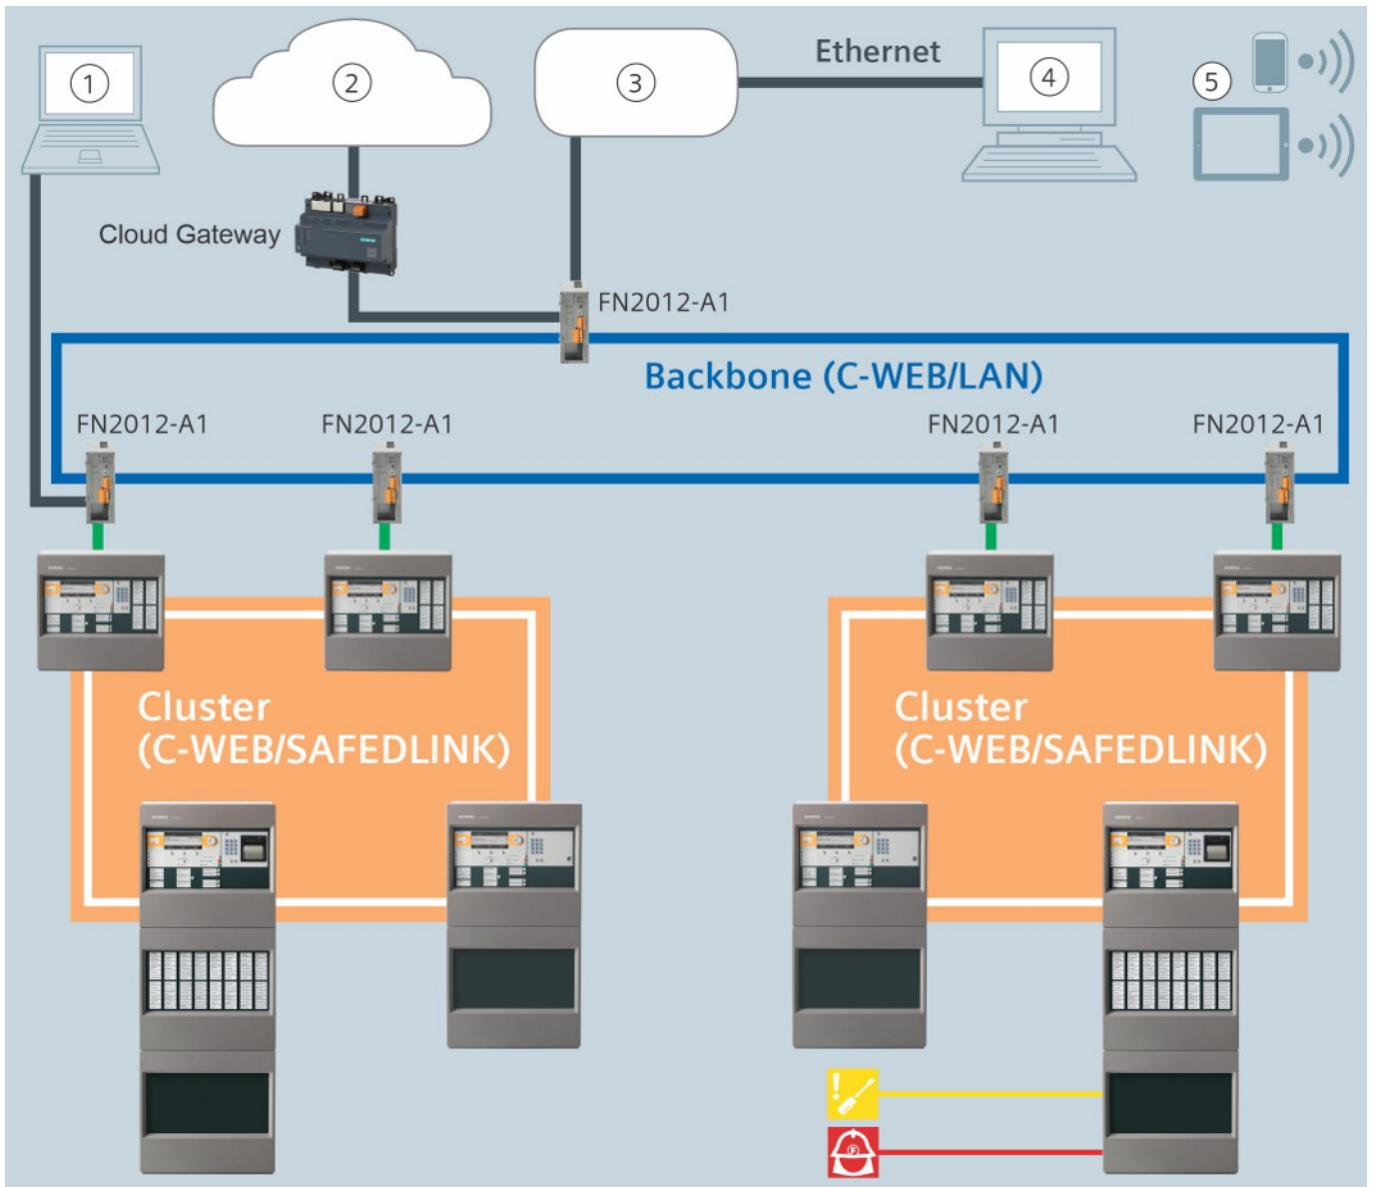




Fig. 4: Backbone

1	Remote access with Cerberus-Remote
2	'Cloud for Buildings'
3	Customer network
4	Management platform
5	Remote access to management platform
	Transmission of a fault signal
	Transmission of an alarm signal

You will find a detailed labeled version of the diagram above along with further information in the A6V10332842 planning guide, see chapter 'Product documentation'.

Stations


Cross-station features and functions

- Fast Ethernet interface for a heterogeneous network
- Processes the signals from the Cerberus PRO FD720 detector series, Cerberus Nova detector series, and the signals from earlier detector series
- Interface to Siemens danger management system
- Slots for RS232 and RS485 serial interfaces
- Floor repeater displays, terminals and alarm devices on the C-NET detector line with power supply via C-NET
- All detector lines are monitored for ground faults.
- Integrated degraded mode function
- Freely configurable, time-dependent controls with optional weekly, monthly, and yearly switching programs
- Time and situation-dependent changeover of detector parameter sets
- Controls for synchronous activation of sounder bases/sounders (acoustic, optical, language)
- The control panel and the fire detection system are custom-configured using the 'Cerberus-Engineering-Tool' software
- Firmware for all processor-controlled control panel components can be updated
- Customer texts can be adapted directly on the operating unit of the control panel or with the 'Cerberus-Engineering-Tool' software
- Up to 13000 events can be called up from the event memory and filtered based on various criteria
- Automatic summer/normal time changeover

FC722



You will find information on the integrated extinguishing system and the individual extinguishing components that are available in a separate data sheet with the document ID 'A6V11480005'.

FC722-ZZ	Housing (Standard)
	<p>Detector line (C-NET)</p> <ul style="list-style-type: none"> • 252 addresses • 2 loops/4 stubs <p>Properties</p> <ul style="list-style-type: none"> • Operating unit • 70 W power supply • Max. battery capacity 12 Ah <p>Options of the operating unit</p> <ul style="list-style-type: none"> • Event printer FTO2001-A1 • Key switch (Kaba) FTO2005-C1 • Key switch (nordic) FTO2006-B1

FC722-ZZG**Housing (Standard)**

Detector line (C-NET)

- 252 addresses
- 2 loops/4 stubs

Properties

- Operating unit
- 70 W power supply
- Connect X200 Gateway
- Max. battery capacity 12 Ah

Options of the operating unit

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1

FC722-YZ**Housing (Standard)**

Detector line (C-NET)

- 252 addresses
- 2 loops/4 stubs

Properties

- Operating unit (+LED indicator)
- 70 W power supply
- Max. battery capacity 12 Ah

Options of the operating unit

- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1

FC722-ZA**Housing (Comfort)**

Detector line (C-NET)

- 252 addresses
- 2 loops / 4 stubs

Properties

- Operating unit
- Operating add-on (empty)
- 250-W power supply
- Max. battery capacity 25 Ah
- 1 flooding zone (optional)

Options of the operating unit

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1
- Operating add-on (2xLED indicator) FCM7213-Y3
- Operating add-on (4xLED indicator) FCM7214-Y3
- Extinguishing terminal (1 sector) XCM2002-A2

FC722-ZE



Housing (Comfort)

Detector line (C-NET)

- 252 addresses
- 2 loops / 4 stubs

Properties

- Operating unit
- Operating add-on (2xLED indicator)
- 250-W power supply
- Max. battery capacity 25 Ah

Options of the operating unit

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1

FC723

FC723-ZA



Housing (Comfort)

C-NET detector line:

- 756 addresses
- 2 loops / 4 stubs
- Can be extended with 2 module bus cards

Installable module bus cards (option):

- Line card (FDnet/C-NET, P) FCL2008-A1
- Line card (SynoLOOP) FCL7201-Z3
- I/O card (programmable) FCI2008-A1
- I/O card (horn/monitored) FCI2009A1
- I/O card (remote transmission) FCI2007-A1

Features:

- Operating unit
- Operating add-on (empty)
- Card cage (2 slots)
- 250-W power supply
- Max. battery capacity 25 Ah



Operating unit options:

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1
- Operating add-on (2xLED indicator) FCM7213-Y3
- Operating add-on (4xLED indicator) FCM7214-Y3

FC724



You will find information on the integrated extinguishing system and the individual extinguishing components that are available in a separate data sheet with the document ID 'A6V11480005'.

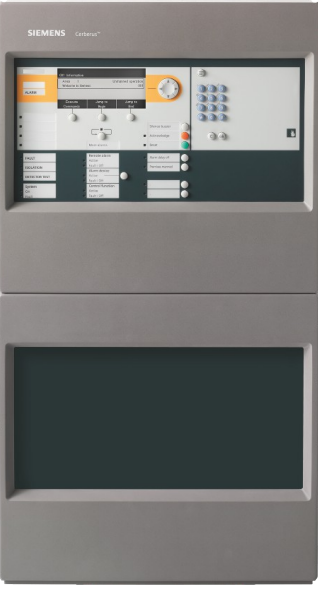FC724-ZA	Housing (Comfort)
	<p>Detector line (C-NET)</p> <ul style="list-style-type: none"> ● 504 addresses ● 4 loops/8 stubs <p>Properties</p> <ul style="list-style-type: none"> ● Operating unit ● Operating add-on (empty) ● 250-W power supply ● Max. battery capacity 25 Ah ● 1 flooding zone (optional) <p>Options of the operating unit</p> <ul style="list-style-type: none"> ● Event printer FTO2001-A1 ● Key switch (Kaba) FTO2005-C1 ● Key switch (nordic) FTO2006-B1 ● Operating add-on (2xLED indicator) FCM7213-Y3 ● Operating add-on (4xLED indicator) FCM7214-Y3 ● Extinguishing terminal (1 sector) XCM2002-A2
FC724-ZAG	Housing (Comfort)
	<p>Detector line (C-NET)</p> <ul style="list-style-type: none"> ● 504 addresses ● 4 loops/8 stubs <p>Properties</p> <ul style="list-style-type: none"> ● Operating unit ● Operating add-on (empty) ● 250-W power supply ● Connect X200 Gateway ● Max. battery capacity 25 Ah ● 1 flooding zone (optional) <p>Options of the operating unit</p> <ul style="list-style-type: none"> ● Event printer FTO2001-A1 ● Key switch (Kaba) FTO2005-C1 ● Key switch (nordic) FTO2006-B1 ● Operating add-on (2xLED indicator) FCM7213-Y3 ● Operating add-on (4xLED indicator) FCM7214-Y3 ● Extinguishing terminal (1 sector) XCM2002-A2

FC724-ZE



Housing (Comfort)

C-NET detector line:

- 504 addresses
- 4 loops/8 stubs

Features:

- Operating unit
- Operating add-on (2xLED indicator)
- 250-W power supply
- Max. battery capacity 25 Ah

Operating unit options:

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1

FC726

FC726-ZA



Housing (Large)

C-NET detector line:

- Max. 1512 addresses
- 4 loops/8 stubs
- Can be extended up to 28 loops/56 stubs

Extra module bus cards (option):

- Line card (FDnet/C-NET, P) FCL2008-A1
- Line card (SynoLOOP) FCL7201-Z3
- I/O card (programmable) FCI2008-A1
- I/O card (horn/monitored) FCI2009A1
- I/O card (remote transmission) FCI2007-A1

Features:


- Operating unit
- Operating add-on (empty)
- Card cage (5 slots)
- 250-W power supply
- Max. battery capacity 45 Ah

Operating unit options:

- Event printer FTO2001-A1
- Key switch (Kaba) FTO2005-C1
- Key switch (nordic) FTO2006-B1
- Operating add-on (2xLED indicator) FCM7213-Y3
- Operating add-on (4xLED indicator) FCM7214-Y3

FT724

- Person Machine Interface that is used remotely from the control panel, which can be optionally provided with its own power supply
- Up to five fire terminals can be configured with system-wide visibility.
- The fire terminal has spaces for installing optional interfaces such as an RS232 or RS485, network modules (SAFEDLINK), and a key switch.
- Each fire terminal has an Ethernet connection.
- The powerful C-WEB can be used to network up to 64 fire control panels FC72x and fire terminals with one another in any way.
- Interface to Siemens danger management system

FT724-ZZ	Housing (Eco)
 A photograph of the Siemens FT724-ZZ fire control panel. It features a large, multi-touch capacitive touch screen displaying a graphical user interface with various status indicators, maps, and control buttons. The screen is housed in a grey, industrial-grade enclosure with a sturdy, rectangular design.	<p>C-NET detector line:</p> <ul style="list-style-type: none">● None <p>Features:</p> <ul style="list-style-type: none">● Operating unit <p>Station options:</p> <ul style="list-style-type: none">● 70 W power supply● 2 batteries, each 7 Ah <p>Operating unit options:</p> <ul style="list-style-type: none">● Event printer FTO2001-A1● Key switch (Kaba) FTO2005-C1● Key switch (nordic) FTO2006-B1

Station application

FC722

For smaller-scale applications, e.g., workshops or hotels.

Also suitable for more comprehensive systems thanks to flexible networking options.

Single-sector extinguishing applications can also be achieved with this station type.

FC723

For medium-sized applications, e.g., for industrial plants, regional banks, or office complexes.

As part of a modernization process, for a gradual and seamless transition from older systems to Cerberus PRO.

FC724

For medium-sized applications, e.g., for industrial plants, regional banks, or office complexes.

Also suitable for more comprehensive systems thanks to flexible networking options.

Single-sector extinguishing applications can also be achieved with this station type.

FC726

For large applications, e.g., for industrial plants, office complexes, or production halls.

As part of a modernization process, for a gradual and seamless transition from older systems to Cerberus PRO.

FT724

For remote operation of a fire detection system, e.g., on one floor.

Application matrix

Use	FC722	FC723	FC724	FC726	FT724
Smaller applications , such as workshops or hotels	●	○	●	○	—
Medium-sized applications , such as medium-sized industrial plants, regional banks, or medium-sized office blocks	○	●	●	○	—
Large applications , such as industrial plants, large office blocks, or production halls	○	○	○	●	—
Large applications with high redundancy requirements , such as airports, power generation facilities, and shopping malls	—	—	—	○	—
Integrable extinguishing	●	—	●	—	—
Modernization of existing fire detection installations	—	●	—	●	—
Scalability due to networking	●	●	●	●	●
Remote operation of an existing fire detection system	—	—	—	—	●






- Preferred application
- Conditionally possible application
- Application not possible or not recommended

Type Overview

Fire control panels



You will find detailed information on the available control panel types and the available variants in the separate data sheet for the respective control panel type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.
[▶ 25\]](#)

	FC722	FC722	FC723	FC724	FC726
					
Housing type	Standard	Comfort	Comfort	Comfort	Large
Supply					
Power supply	1 x 70 W	1 x 250 W	1 x 250 W	1 x 250 W	1 x 250 W
Max. battery capacity	12 Ah	25 Ah	25 Ah	25 Ah	45 Ah
Interfaces					
Slots for module bus cards	–	–	2	–	5
Ethernet port RJ45	1	–	1	1	1
Inputs / outputs					
Number of integrated C-NET lines:					
• Loops (with loop extension) or	2/4	–	2/4	4/8	4/8
• Stubs (with loop extension)	4/8	–	4/8	8/16	8/16
Number of C-NET lines in addition to line cards:					
• Loops/stubs	–	–	2x 4/8	–	5x 4/8
Max. number of C-NET addresses	252	–	756	504	1512
Integrated outputs for alarm and control:					
• RT alarm relay	1	–	1	1	1
• RT fault relay	1	–	1	1	1
• Monitored alarm output	1	–	1	1	1
• Monitored fault output	1	–	1	1	1
Horn output, monitored (with sounder module)	1/4	–	1/8	2/8	2/8

	FC722	FC722	FC723	FC724	FC726
Configurable inputs/outputs 24 V	8		8	12	12
Dimensions (W x H x D)					
With cover cap	443 x 404 x 188 mm	443 x 802 x 188 mm	443 x 802 x 188 mm	443 x 802 x 188 mm	443 x 802 x 288 mm
Without cover cap	430 x 398 x 165 mm	430 x 796 x 165 mm	430 x 796 x 165 mm	430 x 796 x 165 mm	430 x 796 x 265 mm
Degraded mode and emergency supply	Yes				
Emergency power supply	Emergency operation in degraded mode for up to 72 h (depending on configuration)				
Organizational logic	The alarm verification concept (AVC) allows the control panels to be organized in accordance with customer requirements.				
Time functions	Freely configurable, time-dependent controls with optional weekly, monthly, and yearly switching programs				
Timeout functions	If detector zones are isolated, timeout functions can ensure that these detector zones are reactivated.				
Event log	Up to 13000 events can be called up for each station based on various criteria.				
Ground fault monitoring	All the outgoing detector lines running out from the control panels are monitored for ground faults.				

Fire terminals



You will find detailed information on the available terminal types and the available variants in the separate data sheet for the respective terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.
 You will find detailed information on the available terminal types and the available variants in the separate data sheet for the respective terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.
 You will find detailed information on the available terminal types and the available variants in the separate data sheet for the respective terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.

FT724	
	
Housing type	Eco
Supply	
Battery capacity	2x 12 V, 7 Ah (optional)
Power supply	DC 20...30 V
Power supply	External or FP2015
Interfaces	
Slots for serial modules	2
Slot for network modules (SAFEDLINK)	2
Ethernet port RJ45	1
Dimensions (W x H x D)	
With cover cap	443 x 404 x 108 mm
Without cover cap	430 x 398 x 85 mm
Degraded mode and emergency supply	Via external supply or with power supply and batteries option
Emergency power supply	Emergency operation in degraded mode for up to 72 h (depending on supply)
Organizational logic	The alarm verification concept (AVC) allows the control panels to be organized in accordance with customer requirements.
Timeout functions	If detector zones are isolated, timeout functions can ensure that these detector zones are reactivated.
Event memory	Up to 13,000 events can be called up for each station based on various criteria

Accessories

You will find information on accessories and possible extensions in the separate data sheet for the respective control panel or terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.

Device combinations

Hardware extensions



You will find detailed information on the hardware extensions and compatibilities in the separate data sheet for the respective control panel or terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.

Hardware extension	FC722	FC723	FC724	FC726	FT724
Network module (SAFEDLINK) FN2001-A1	•	•	•	•	•
Repeater (SAFEDLINK) FN2002-A1	•	•	•	•	•
Loop extension (FDnet/C-NET, P) FCI2025-A1	•	•	•	•	–
Line card (FDnet/C-NET, P) FCL2008-A1	–	•	–	•	–
Line card (SynoLOOP) FCL7201-Z3	–	•	–	•	–
I/O card (remote transmission) FCI2007-A1	–	•	–	•	–
I/O card (programmable) FCI2008-A1	–	•	–	•	–
I/O card (horn, monitored) FCI2009-A1	–	•	–	•	–
Sounder module FCA2005-A1	•	•	•	•	–
RS232 module (isolated) FCA2001-A1	•	•	•	•	•
RS485 module (isolated) FCA2002-A1	•	•	•	•	•
Fire brigade periphery module (DE) FCI2001-D1	•	•	•	•	–
Extinguishing card XCI2005-A1 ¹	•	–	•	–	–
Event printer FTO2001-A1	•	•	•	•	•
LED indicators	•	•	•	•	•
Connect X200 Gateway ¹	•	•	•	•	–

- Extension feasible
- Extension not feasible

¹⁾ Installation is feasible only if there is sufficient space in the housing.

Line devices

Fire detector



- Fire detectors with the latest generation of evaluation algorithms.
- Signals are processed using **ASAtechnology™**.
- Time-dependent and process-dependent detection behavior.
- Maximum detection reliability thanks to unique detector properties.

Radio fire detection system



- Radio fire detection system with full integration into C-NET
- Wireless coupling with mesh technology
- Costly or visible cable installations are not required, which makes the radio fire detection system particularly useful for museums and churches
- Installation can be carried out without interrupting operation.
- Radio gateway FDCW241 communicates with up to 30 radio detectors (smoke detectors and manual call points), with up to 16 overlapping radio cells supported at each point.

Aspirating smoke detector



FDA22x, FDA24x



FDA26x

- Aspirating smoke detectors are designed to detect smoke at a very early stage and are intended to protect small areas that are classed as operationally critical.
- The detector continually sucks in air samples through extraction openings in a network of pipes.
- The air is supplied to a detection chamber where the presence of the smallest smoke particles can be detected using dual-wavelength technology or laser light.

Sounders and sounder bases (sounders, sounder beacons, voice sounders)



- Operation of the sounders and sounder bases on the C-NET detector line.
- Supply and communication via C-NET
- No costly additional cabling required
- Meets the requirements of the EN 54-3 standard
- Max. 16 tones to choose from, 2 programmable events: 'Warning (ALERT)' and 'Evacuation (EVAC)*'
- Optional: integrated beacon*; meets the requirements of the EN 54-23 standard
- Optional: additional voice output*:
 - 15 languages integrated in the device, additional languages can be ordered
 - Each voice message can be emitted in two languages
 - Max. seven available events
 - Customer-specific voice messages and/or tones can be ordered


* Only possible for certain types of sounders and sounder bases.

Input and output modules




- Statuses can be monitored using an input module, e.g., door monitors, fan controls, or for the activation of sprinkler alarms.
- Input/output modules are used for the decentralized controls of fire safety doors, fans, and similar applications.
- The inputs can be used for confirmation purposes, for monitoring statuses, or for controlling the standard extinguishing interface (SST) in accordance with VdS.
- The transponder has two inputs/outputs that can be configured for the following applications:
 - Connection of collective limit value detectors
 - Monitored control of alarm devices

Line separator

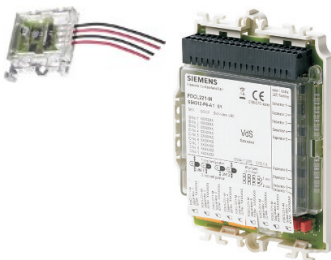

- A line separator ensures that multiple stub lines do not fail in the event of a short-circuit.
- The line separator is installed between two stubs on the C-NET if there are no other Cerberus PRO line devices between the stubs which can perform a line separation function.

Mimic display driver

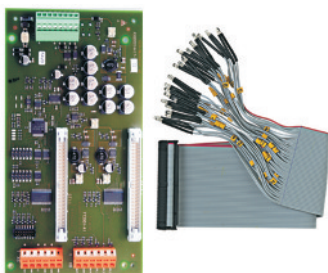

- The mimic display driver FT2001-A1 has 2x 24 outputs for controlling mimic display LEDs.
- Operation on the C-NET detector line
- Two control outputs for 'Local buzzer' and 'LED operation'
- Two inputs for 'Silence buzzer' and 'LED test'
- The LEDs are connected via a ribbon cable.

Floor repeater terminal and floor repeater display



- The floor repeater terminal FT2010 and the floor repeater display FT2011 are operated directly on the C-NET detector line.
- The floor repeater display FT2011 displays messages and events from selected areas of the fire detection system.
- The floor repeater terminal FT2010 displays messages and events from selected areas of the fire detection system and also enables operation.
- The responsible customer personnel (e.g., ward nurses) have access to a clear and well laid-out user interface. This displays customer-specific plain text messages to enable pinpointing of events.
- The display is of the same type as fire terminal FT724.

Details for ordering

You will find ordering information in the separate data sheet of the respective control panel or terminal type and in the system documentation. You will find information on the document ID of the documents in section 'Product documentation [► 25]'.

Product documentation

Title	Document ID
System documentation	
System description	A6V10210355
Product data	A6V10210368
Planning	A6V10210362
Mounting/Installation	A6V10210390
Data sheets	
FC721 - fire control panel	A6V10203220
FC722 - fire control panel	A6V10206525
FC723 - fire control panel for modernization	A6V10379246
FC724 - fire control panel	A6V10207176
FC726 - fire control panel (modular)	A6V10263277
FT724 - fire terminal	A6V10207898
Fire detection system with integrated single-sector extinguishing	A6V11480005
Network Security Guidelines	A6V101039439
Planning overview	A6V10332842



Related documents such as the environmental declarations, declarations of conformity, etc., can be downloaded from the following Internet address:

www.siemens.com/bt/download




Notes

Safety

 CAUTION	
	<p>National safety regulations</p> <p>Failure to comply with national safety regulations may result in personal injury and property damage.</p> <ul style="list-style-type: none">• Observe national regulations and comply with the appropriate safety regulations.

Disposal

	<p>This symbol or any other national label indicates that the product, its packaging, and, where applicable, any batteries may not be disposed of as domestic waste. Delete all personal data and dispose of the item(s) at separate collection and recycling facilities in accordance with local and national regulations.</p> <p>For additional details, refer to to Siemens information on disposal.</p>
---	---

Guarantee

Technical data on specific applications are only valid together with Siemens products listed under "Equipment combinations". Siemens rejects any and all warranties in the event that third-party products are used.

Technical data

You will find information on the technical data of the individual fire control panels and fire terminals in the separate data sheet for the respective control panel or terminal type. You will find information on the document ID of the documents in section 'Product documentation [▶ 25]'.