


ResQ-WINDOW™

VISION PANEL FOR FIRE CURTAINS

WWW.COOPERSFIRE.COM

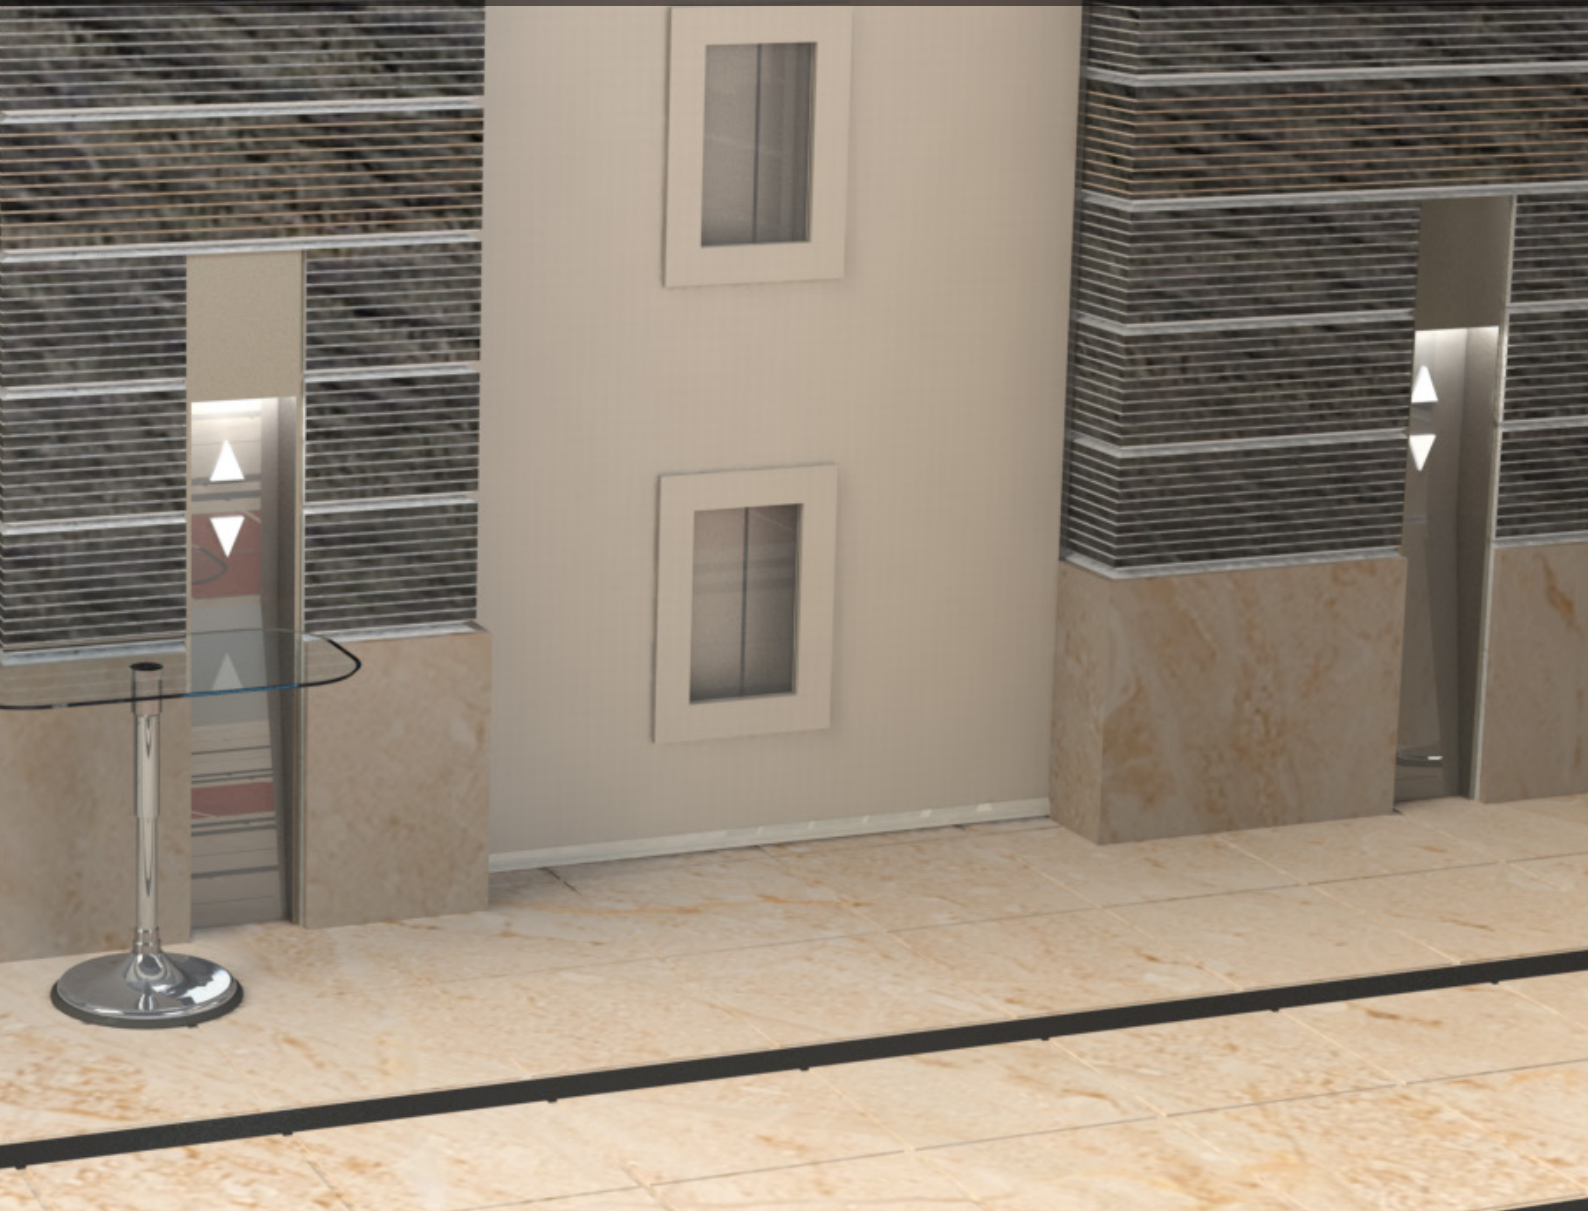

LEADING THE WAY IN FIRE PROTECTION

The ResQ-Window™ can be installed into a Coopers Fire fire curtain allowing building occupants and first responders to see through the curtain after it has been deployed.

ResQ-Window™ can withstand temperatures in excess of 1000°C with 2 hours integrity (E120) and is tested to BS EN 1634-1.

The curtain with a vision panel is designed for:

- Escape routes incorporating doorways and corridors
- Lift openings and lobbies
- Areas where Fire Marshals and the Fire and Rescue Service may need to assess prior to entry

BS 9999 and Approved Document B both reference the requirement and benefits of vision panels used in fire safety in occupied buildings.

The ResQ-Window™ can be positioned to allow a low and high level view through the curtain if required.

BENEFITS

- See through a deployed curtain as a means of escape
- Safely egress from lifts
- Suitable for lift lobby muster points
- First responder can clear a building faster
- First responder can see the presence of an occupant on the other side of a curtain
- First responder can see the presence of fire on the other side of a curtain
- First responder can see the presence of smoke on the other side of a curtain



ResQ-Window™ is a unique translucent fire proof flexible material created to address the need for a vision panel in a deployable fire curtain system.

FEATURES

- ResQ-Window™ can withstand temperatures up to 1000°C
- ResQ-Window™ can be installed to any standard fire curtain
- ResQ-Window™ has been tested to BS EN 1634-1
- ResQ-Window™ has 2 hours integrity (120 minutes fire resistance)
- ResQ-Window™ is strong, flexible and has no toxic gassing or surface flaming when exposed to fire
- ResQ-Window™ is made from specialised high purity silica fabrics, extremely high purity silicone optical resins, and nano-particle silica opacifiers



The ResQ-Window™ is tested to BS EN 1634-1. It is third party approved and certified to **E120 EW30 (120 mins fire resistance and 30 mins radiant heat)**.



For information, to get a quote
or to book a CPD workshop

Please call:

+44 (0)2392 454 405

or E-mail: info@coopersfire.com

WWW.COOPERSFIRE.COM

Coopers Fire Ltd
Ignis House, Houghton Avenue
Waterlooville, Hampshire
PO7 3DU, United Kingdom

Phone: +44 (0)2392 454 405

Email: info@coopersfire.com

Web: www.coopersfire.com

Coopers Fire Ltd has a policy of
continuous product improvement.

As such we reserve the right to
change design and specifications
without prior notice.

Please check our website for the
latest information.

© Coopers Fire Ltd. All content and products are copyright
of Coopers Fire Ltd. Registered in England Number: 2010274.
Multiple patents granted and pending.

v07 Oct 2022



LEADING THE WAY IN FIRE PROTECTION